



INSPECTION HATCHES JOIN SYSTEM

STRENGTHS

1	New aluminium frames with high mechanical strength; applicable coating thickness 12.5-15-25 mm.
2	Exclusive torsion-resistant corner fastening system.
3	Internal panel expulsion system with steel fasteners.
4	Internal panel anti-detachment safety system with steel cable and snap-hook.
5	Bottom-hung opening, removable door; rotating opening, non-removable door. Square, rectangular formats with a fixed pitch of 50 mm, to size.

DIAGRAM OF THE MATERIAL COUPLING METHOD.

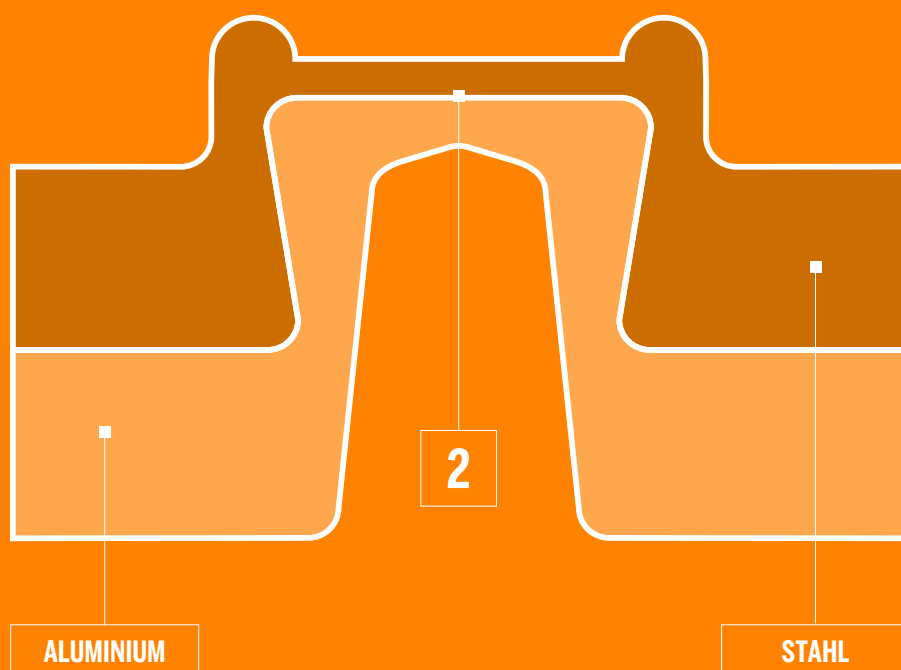


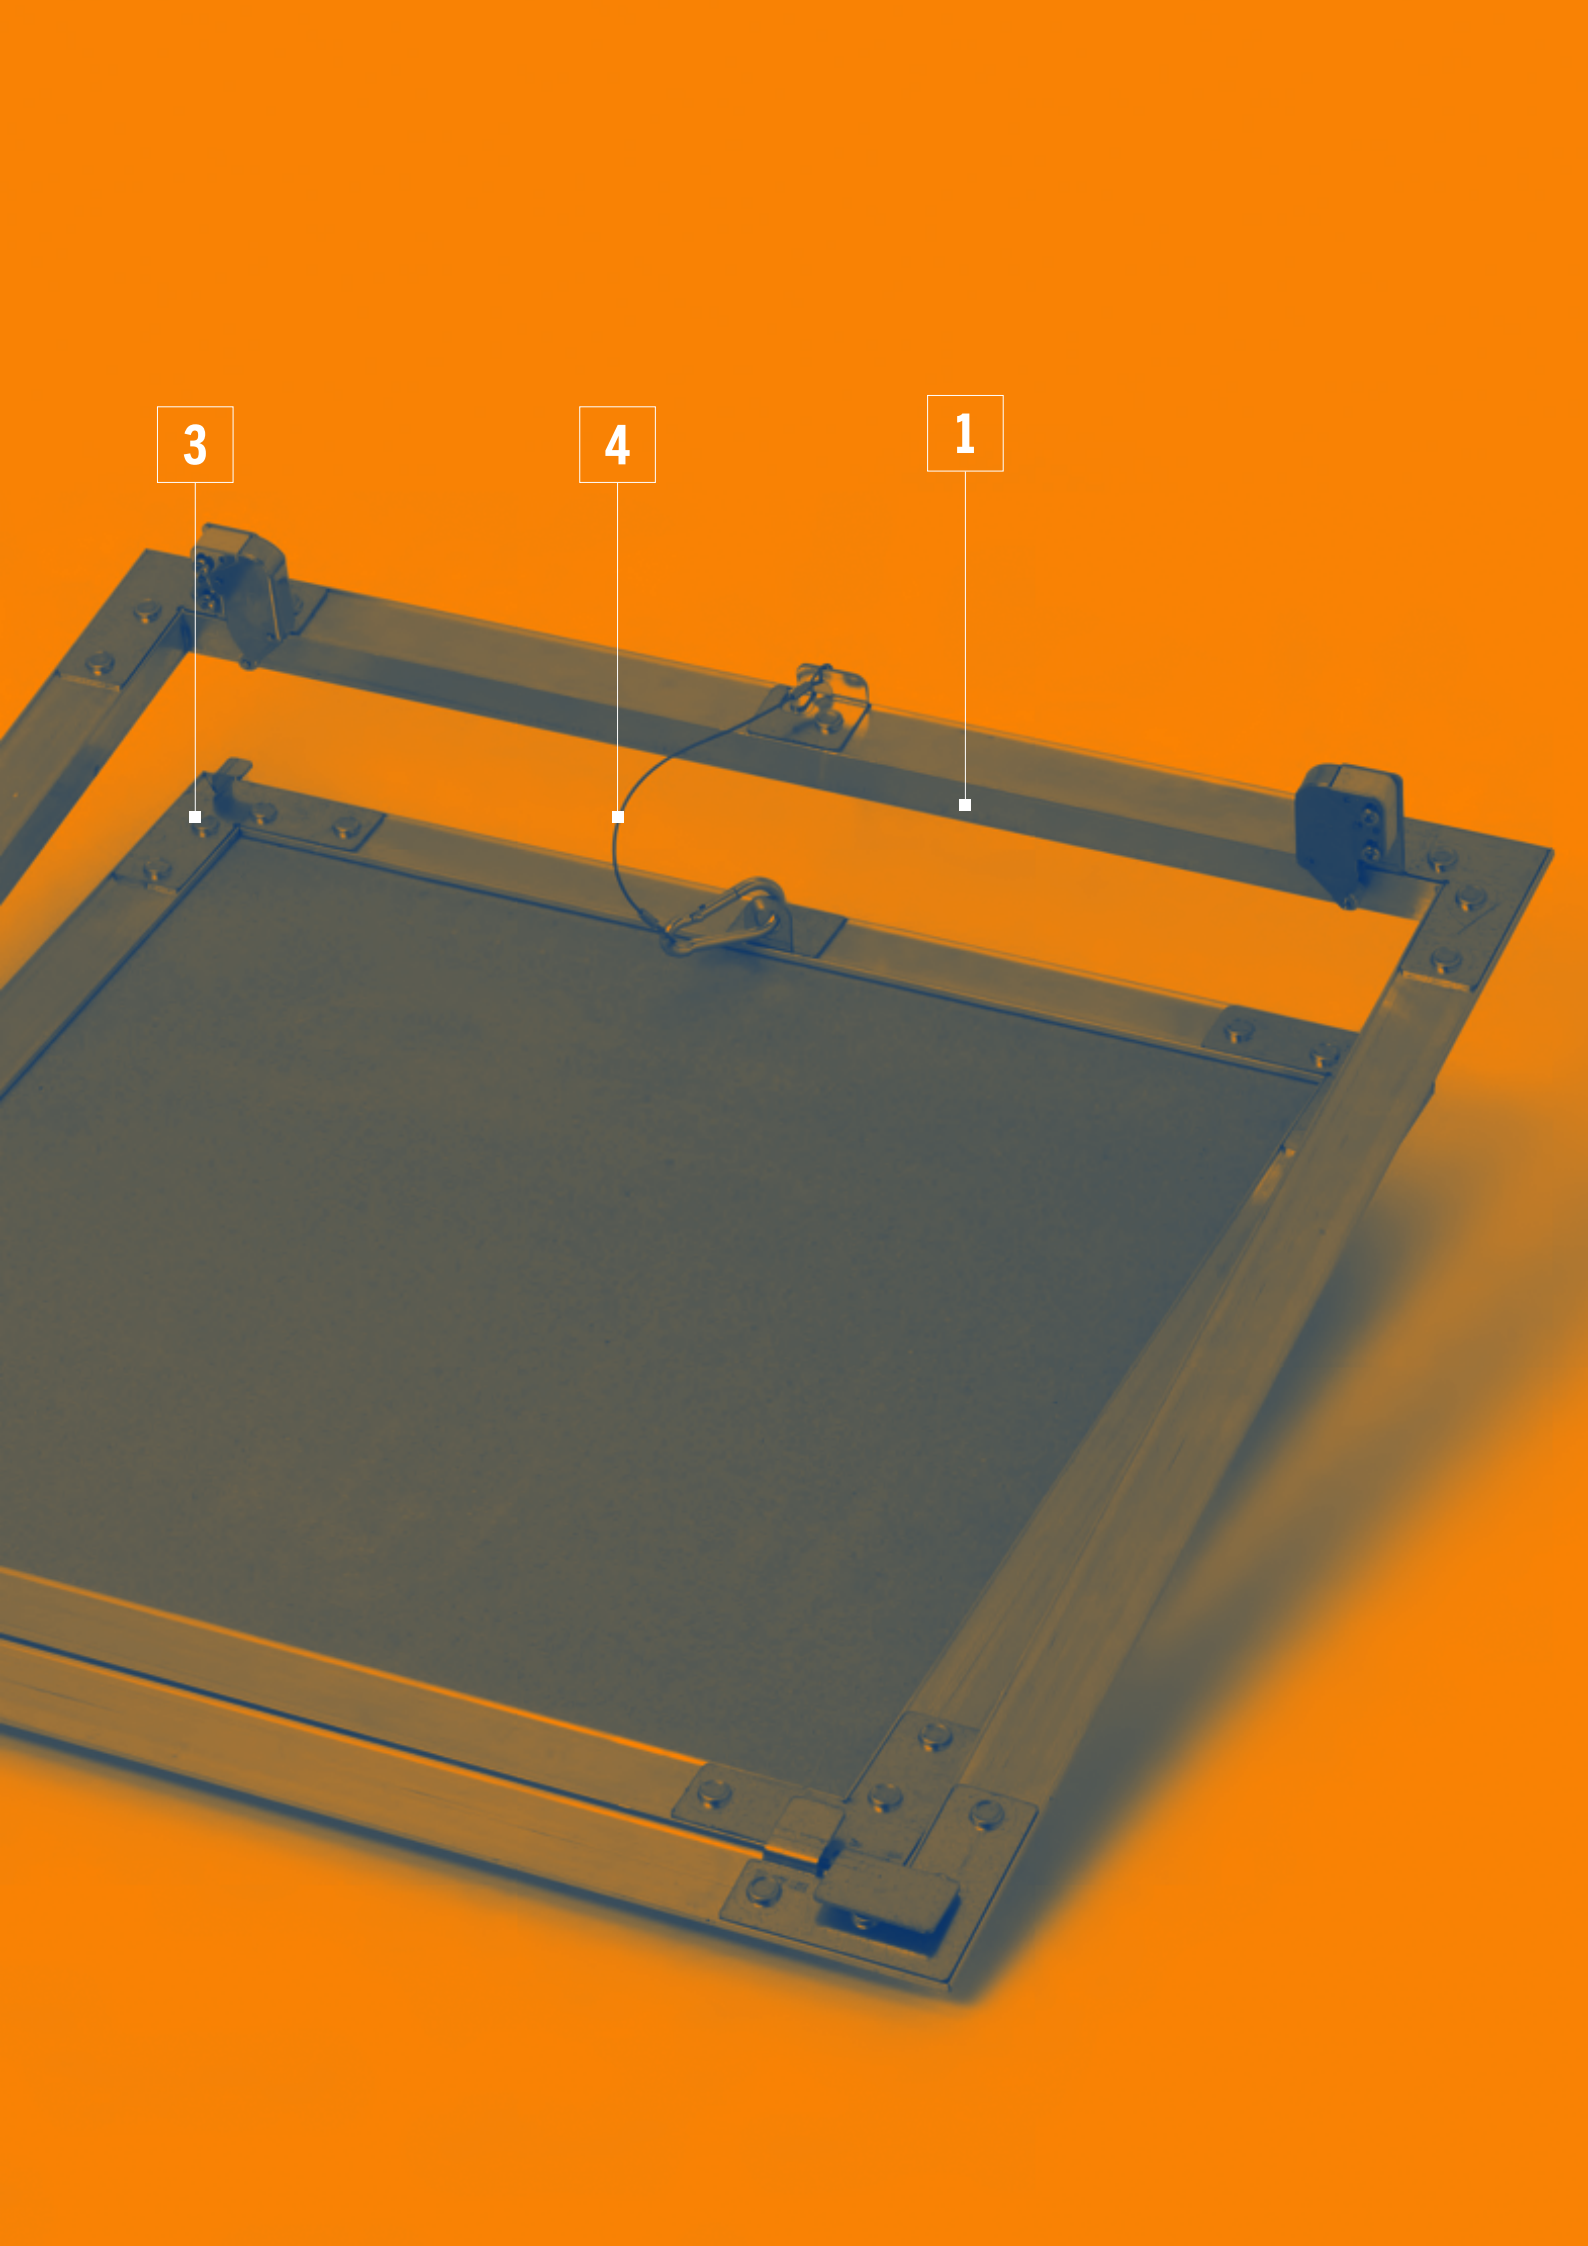



3

4

1

AXONOMETRIC APPLICATION VIEW METALSTAMPI PRODUCTS JOIN SYSTEM HATCHES

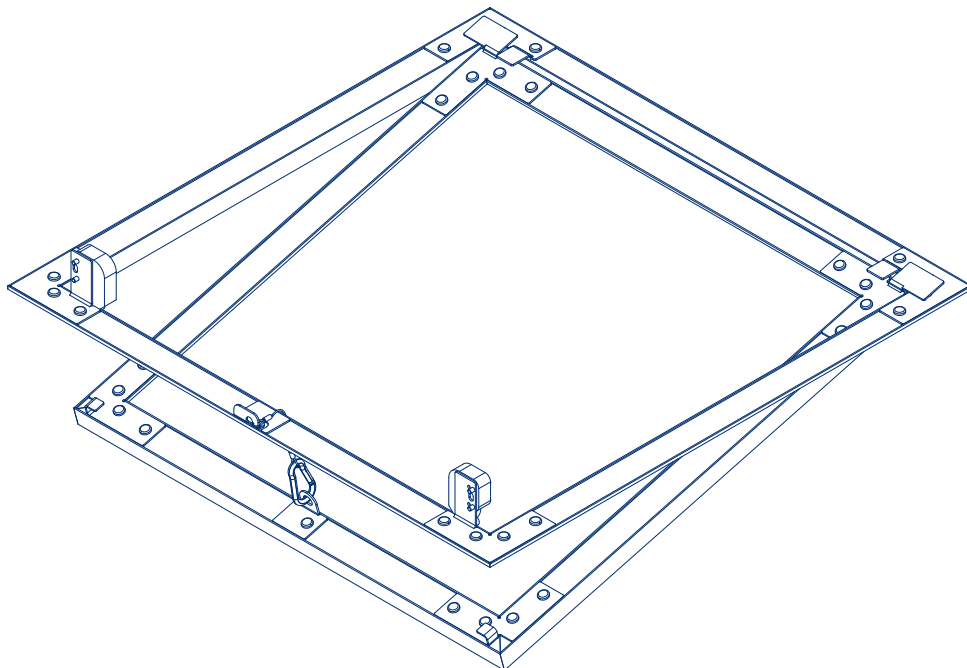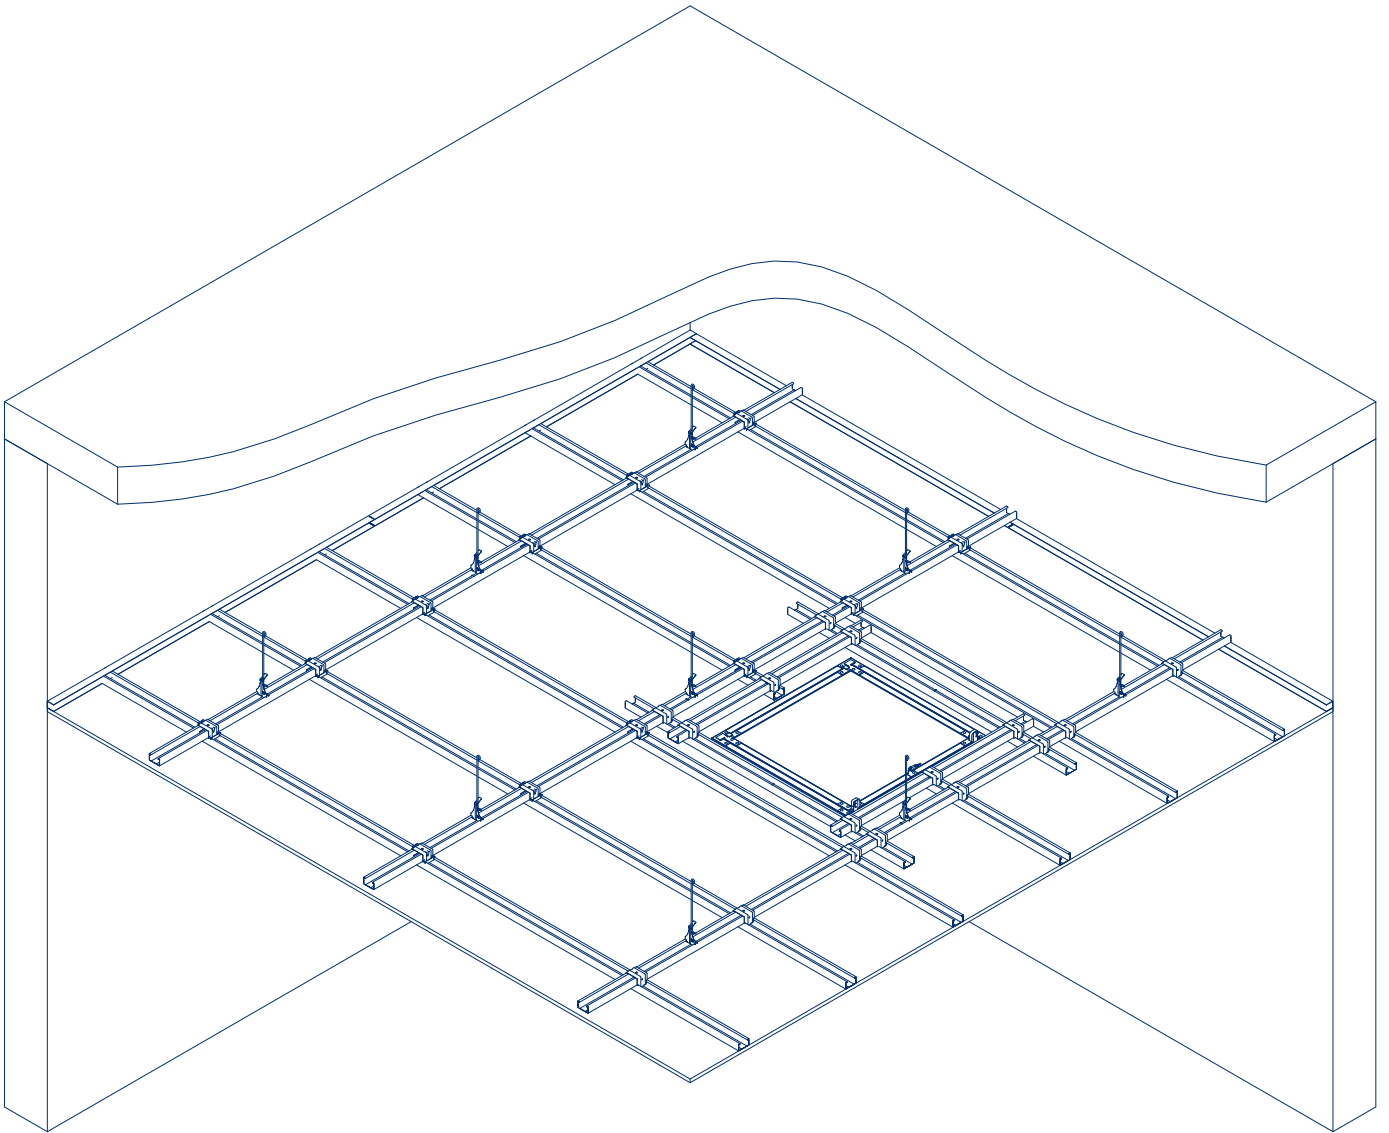

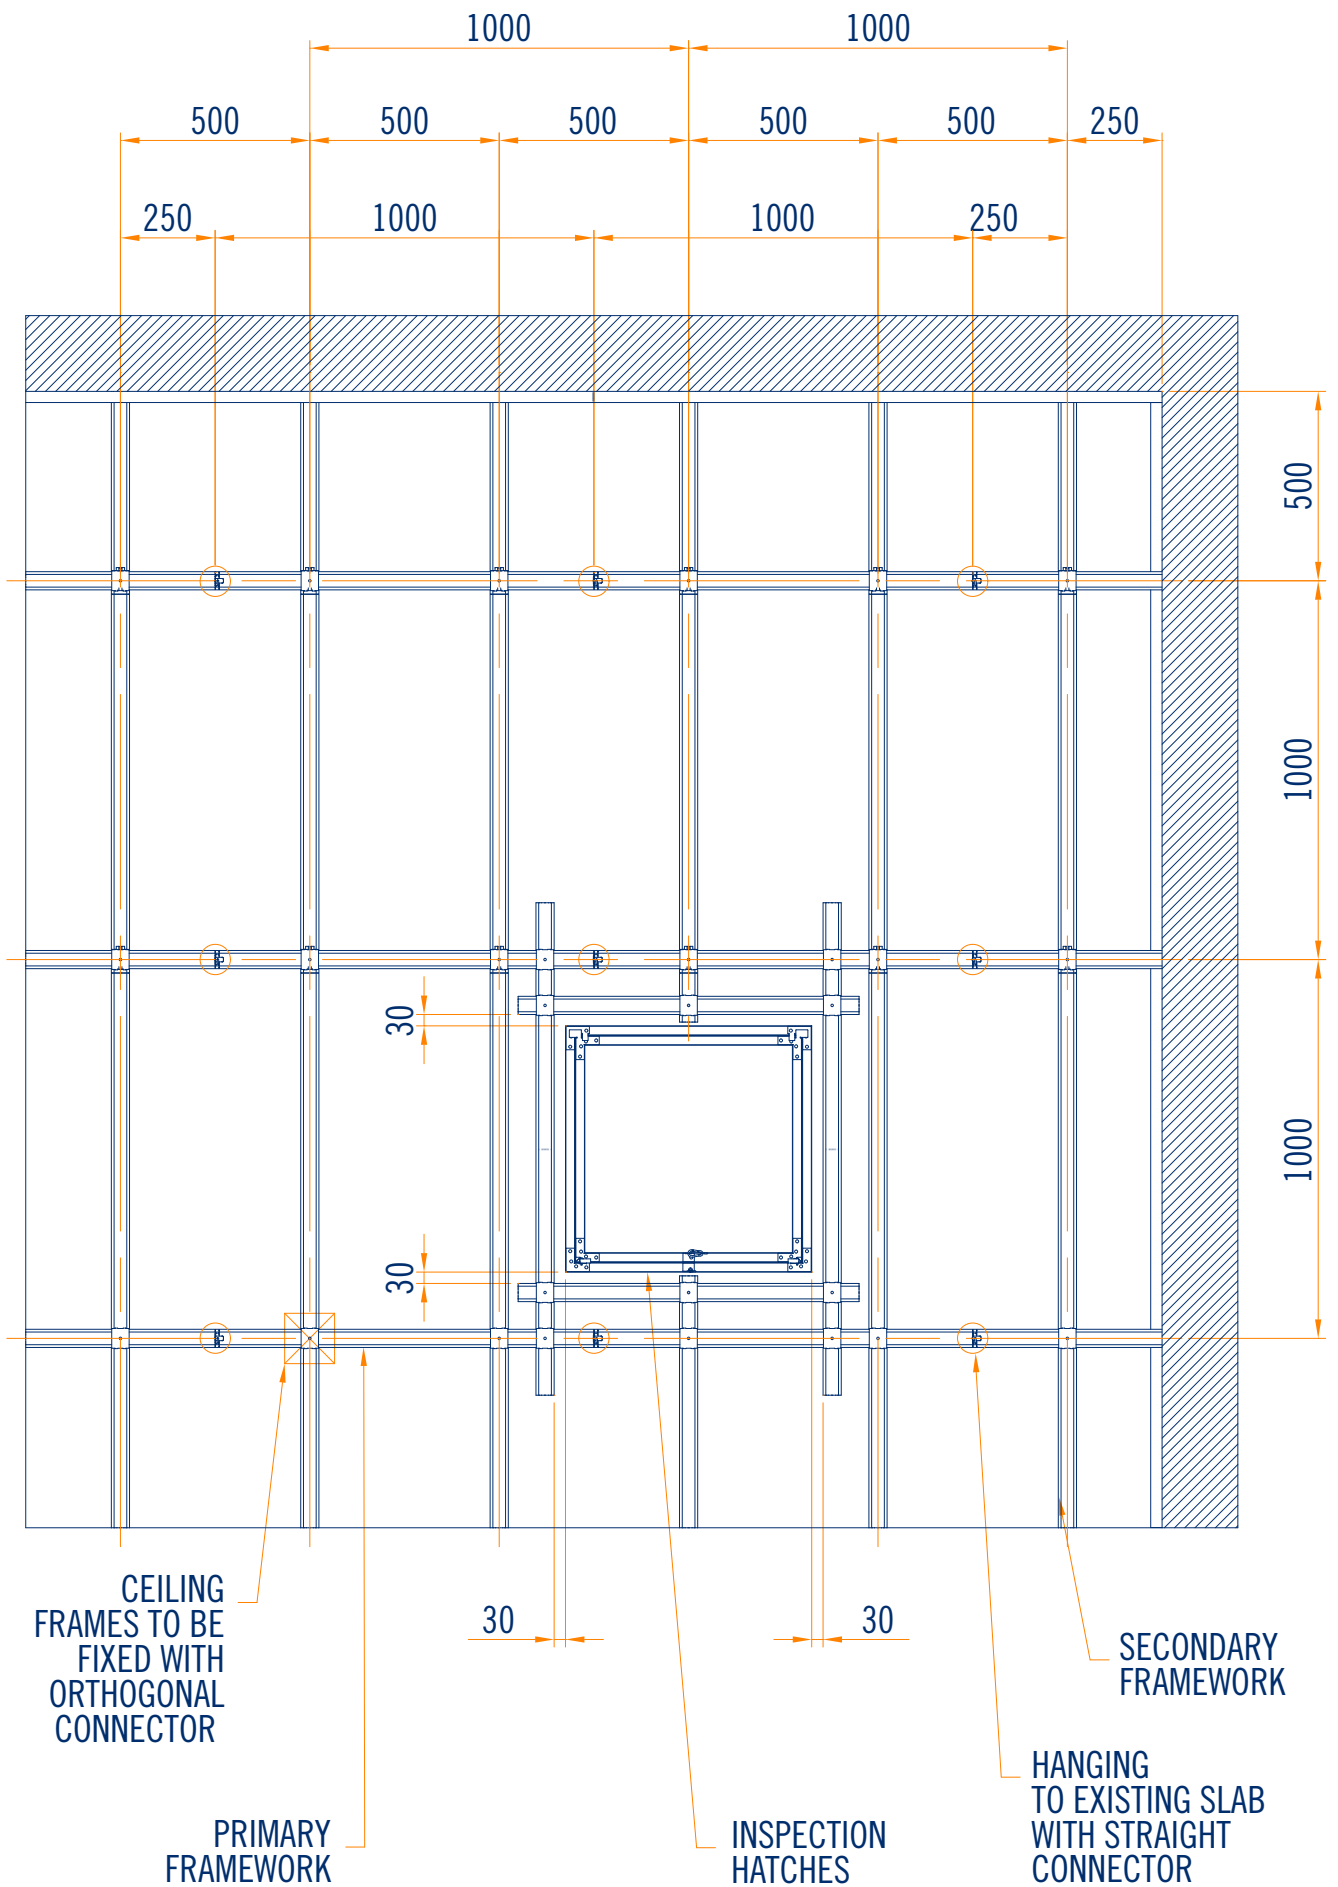


JOIN SYSTEM AIR STOP S 12,5


T=12,5 (VASISTAS OPENING)

Cod.	Description	Dimension and thickness	Weight per package	Application	Sales unit
	Plasterboard inspection hatch with Idro-plate, silicone gasket on the external frame, removable bottom-hung door, vasistas opening	net clearance LxL t 12.5			
BG00200200JS		200x200	1,10		1 piece
BG00300300JS		300x300	1,80		1 piece
BG00400400JS		400x400	2,80		1 piece
BG00500500JS		500x500	4,10		1 piece
BG00600600JS		600x600	5,40		1 piece
BG00700700JS		700x700	8,20		1 piece
BG00800800JS		800x800	10,50		1 piece
BG00900900JS		900x900	12,20		1 piece
BG10001000JS		1000x1000	15,00		1 piece
BG11001100JS		1100x1100	18,50		1 piece
BG12001200JS		1200x1200	22,00	ceiling wall	1 piece


up to 600x600 dimensions of the sheet, grouting is not required

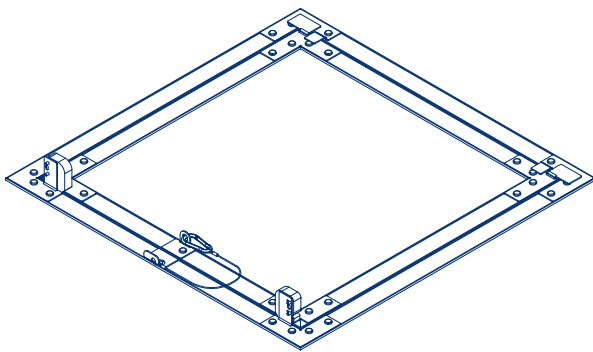


axonometric view (closed) scale 1:10

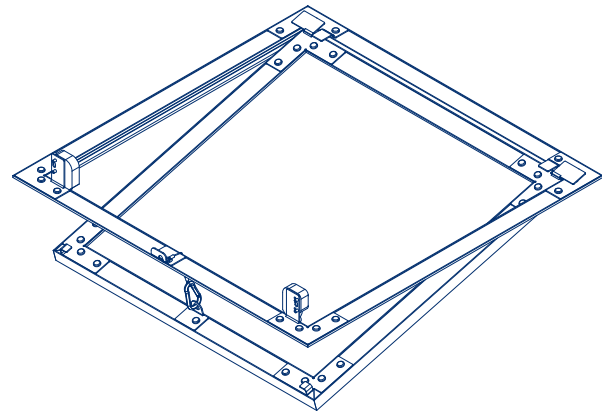

axonometric view (opened) scale 1:10

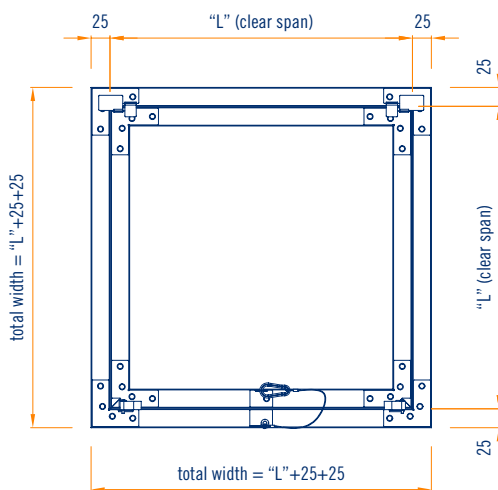

plan view (closed) scale 1:10

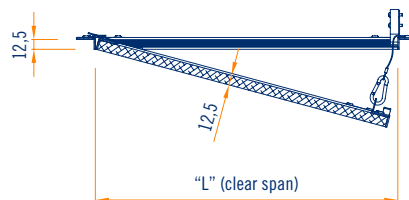


section (opened) scale 1:10

PLASTERBOARD INSPECTION HATCHES JOIN SYSTEM STANDARD SQUARE T 12,5 SINGLE PACKAGING


T=12,5 (VASISTAS OPENING)

Cod.	Description	Dimension and thickness	Weight per package	Application	Sales unit
	plasterboard inspection hatch with idro plate, removable bottom-hung door	net clearance LxL t 12.5			
BS00200200JS-1		200x200	1,10	ceiling wall	1 piece
BS00300300JS-1		300x300	1,80		1 piece
BS00400400JS-1		400x400	2,80		1 piece
BS00500500JS-1		500x500	4,10		1 piece
BS00600600JS-1		600x600	5,40		1 piece


up to 600x600 dimensions of the sheet, grouting is not required

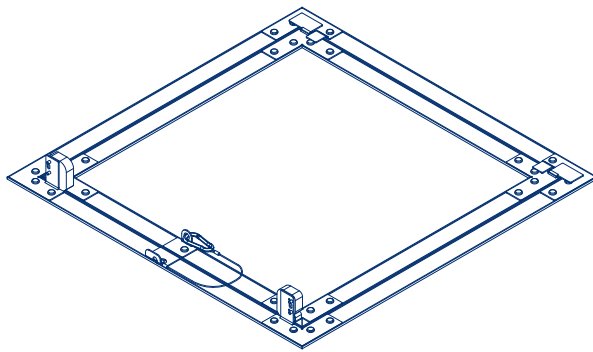


axonometric view (closed) scale 1:10

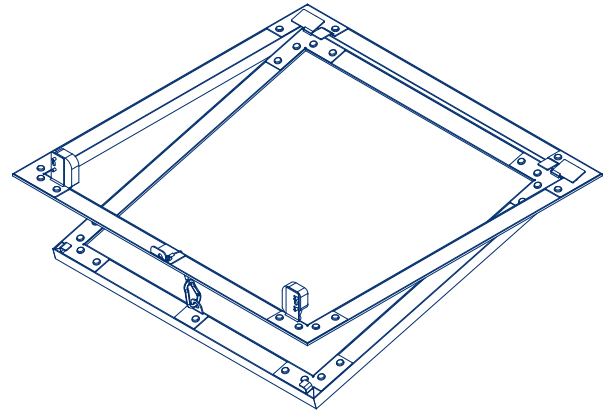

axonometric view (opened) scale 1:10

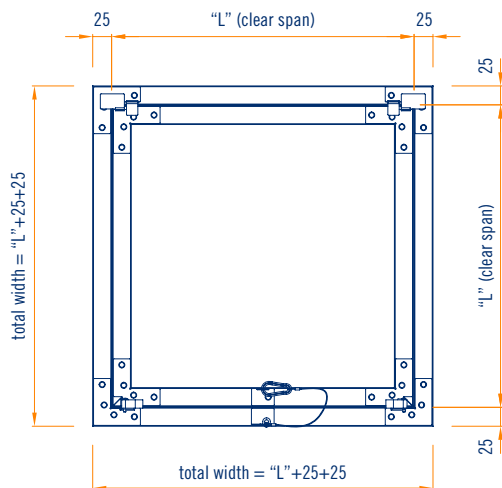

plan view (closed) scale 1:10

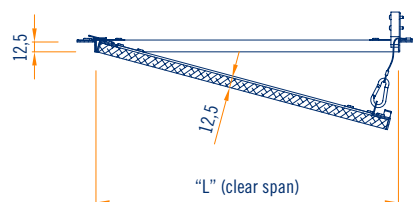


section (opened) scale 1:10

PLASTERBOARD INSPECTION HATCHES JOIN SYSTEM STANDARD SQUARE T 12,5


T=12,5 (VASISTAS OPENING)

Cod.	Description	Dimension and thickness	Weight per package	Application	Sales unit
	plasterboard inspection hatch with idro plate, removable bottom-hung door	net clearance LxL t 12,5			
BS00200200JS		200x200	2,00		2 pieces
BS00300300JS		300x300	3,57		2 pieces
BS00400400JS		400x400	5,61		2 pieces
BS00500500JS		500x500	8,00		2 pieces
BS00600600JS		600x600	10,79		2 pieces
BS00700700JS		700x700	8,20		1 piece
BS00800800JS		800x800	10,50		1 piece
BS00900900JS		900x900	12,20		1 piece
BS10001000JS		1000x1000	15,00		1 piece
BS11001100JS		1100x1100	18,50		1 piece
BS12001200JS		1200x1200	22,00	ceiling wall	1 piece


up to 600x600 dimensions of the sheet, grouting is not required

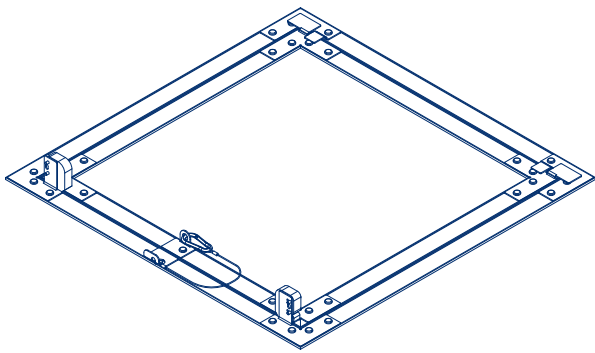


axonometric view (closed) scale 1:10

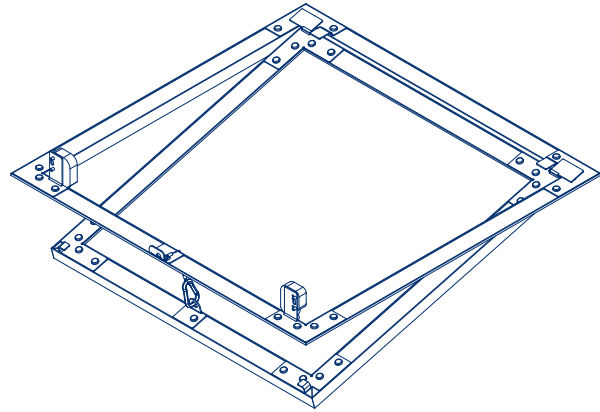

axonometric view (opened) scale 1:10

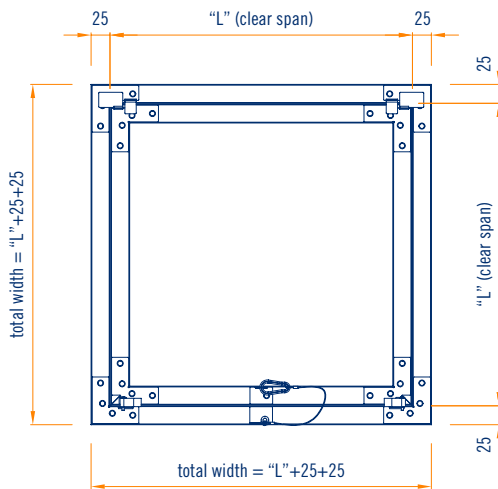

plan view (closed) scale 1:10


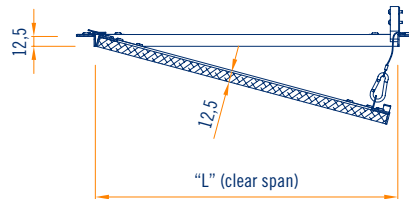


section (opened) scale 1:10

INSPECTION HATCHES WHITE BOX

STRENGTHS


- | | |
|----------|--|
| 1 | Visible surfaces. |
| 2 | RAL 9016 white lacquered surface finish. |
| 3 | Applicable on covering thickness of 12.5-15-25 mm. |
| 4 | Removable door with rotating opening. |

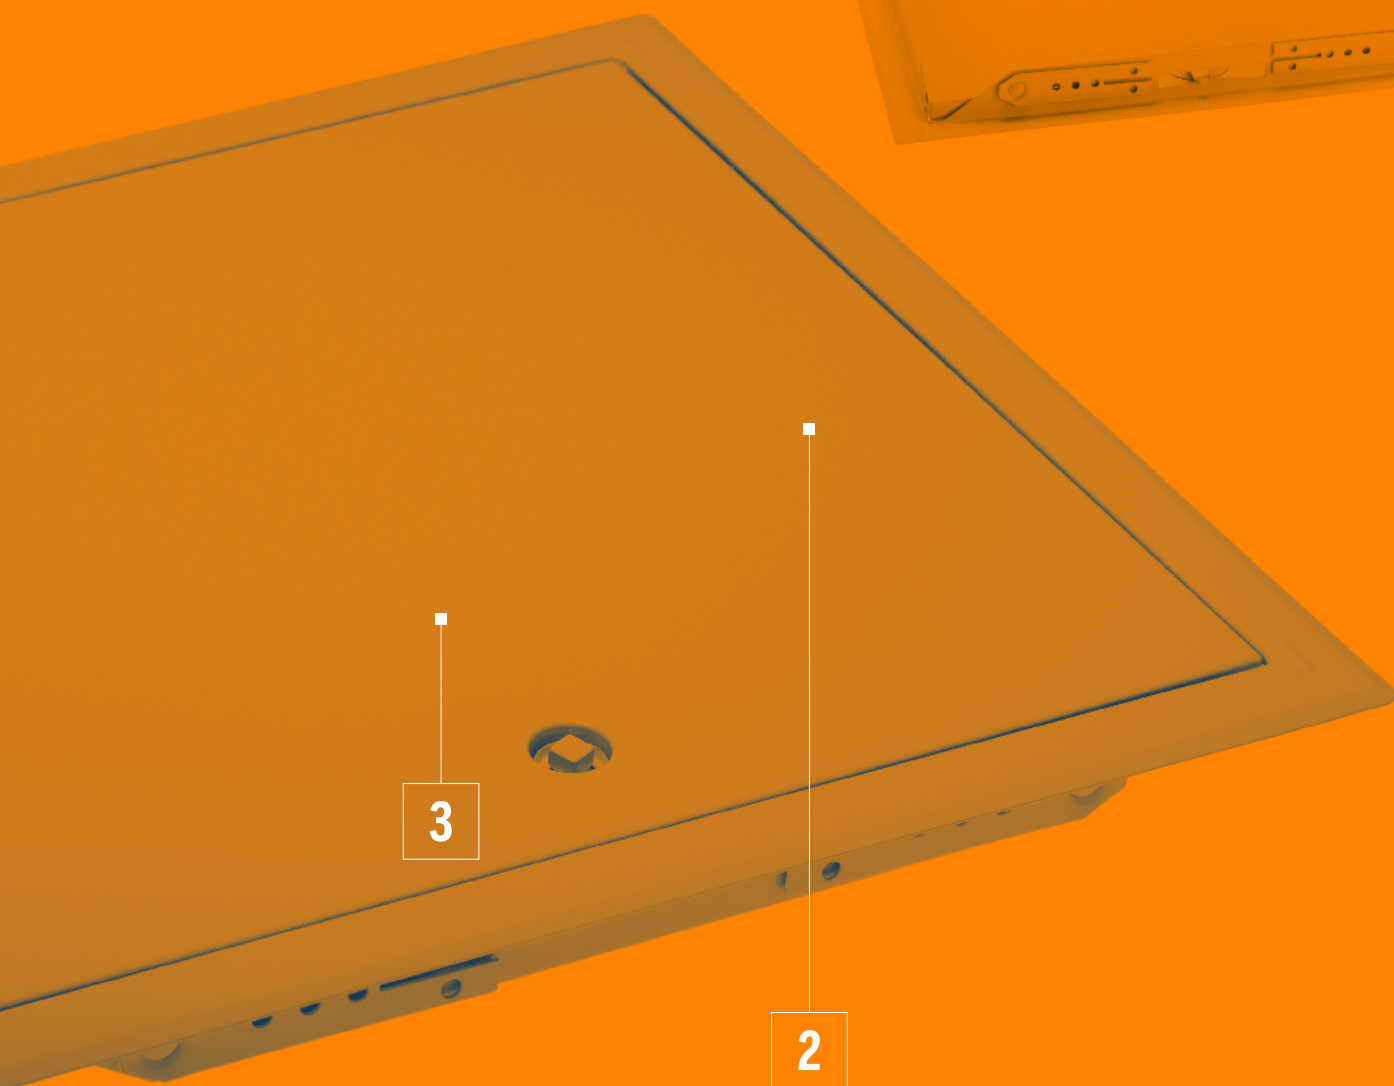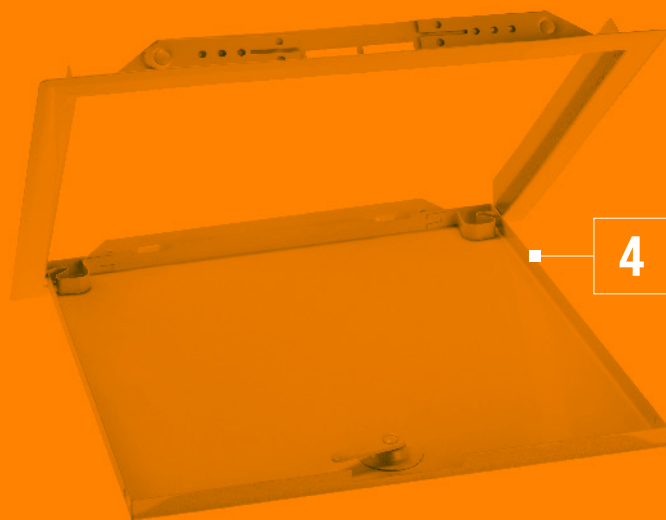


INSPECTION HATCHES MADE OF SHEET METAL PAINTED WHITE

STANDARD T=12,5 - 15 - 25


Code	Description	Dimension and thickness	Weight per package	Application	Sales unit
	inspection hatch made of sheet metal painted white, rotates to open, removable door	net clearance LxL t 12.5-15-25			
BW00200200		200x200	0,54	ceiling wall	1 piece
BW00300300		300x300	1,10		1 piece
BW00400400		400x400	1,60		1 piece
BW00500500		500x500	2,80		1 piece
BW00600600		600x600	3,80		1 piece

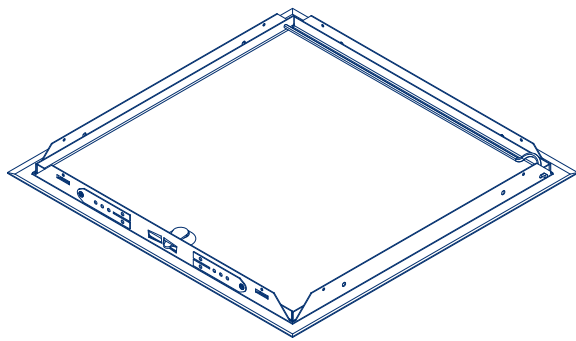


axonometric view (closed) scale 1:10

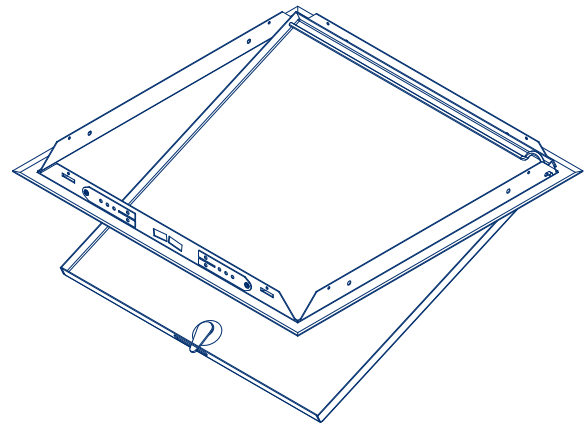

axonometric view (opened) scale 1:10

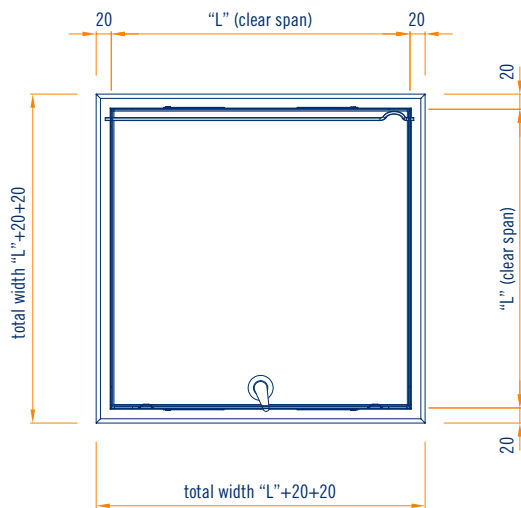

plan view (closed) scale 1:10

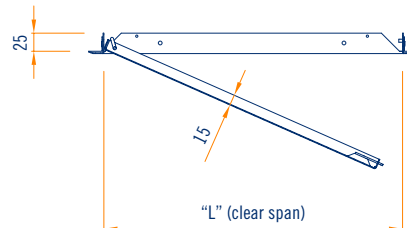

section (opened) scale 1:10

IMPORTANT RECOMMENDATIONS FOR USING AND STORING PRODUCTS

CE MARKING

Please note that each product is part of a hanging/connection kit for connecting to the upper anchoring system and to the supporting element in dry construction systems **for use inside buildings**.

The various components are identified in the catalogue and price list with the CE logo.

Each CE product has a Declaration of Performance (DOP).

Durability: class B (Components of a building exposed to variable relative humidity up to 90% and to variable temperatures up to 30°C but with no exposure to corrosive pollution agents).

RECOMMENDATIONS FOR STORING METAL FRAMING ELEMENTS

We recommend to store packages in a covered area with a relatively dry atmosphere and as constant a temperature as possible, to avoid condensation that could consume the passivation coat protecting the galvanised surface.

If stored outdoors (**not recommended**), please cover so as to ensure the material is fully protected against adverse weather conditions (rain, fog, snow), making sure the packages are stored in a slightly inclined position. The cover must nevertheless ensure sufficient airflow (the two surfaces must not be in direct contact) so that moisture does not settle and create condensation.

GENERAL SALES CONDITIONS

- Payment for orders must comply with the terms established upon confirmation of order.
- The order will be filled, shipped and delivered in the shortest time possible.
- No claims for damage, even partial may therefore be made in case of delay.
- The cost of transportation and packaging will be included in the sales price, unless the order is below the established quantity for a minimum order.
- No returns will be accepted for custom orders under any condition.
- Returns (only for standard products) will be accepted with a depreciation of 30% of purchase value (for re-packaging and handling expenses), in unopened boxes and upon verification of the condition of the material, and within no more than a year of production.
- The transportation for the return of materials will be at the expense of the customer
- 24-month warranty for design and production flaws is guaranteed from the delivery date.
- All disputes shall be subject to the exclusive jurisdiction of the court of Treviso.

© COPYRIGHT 2024 METALSTAMPI SRL (TV) - ITALY

All rights reserved and subject to industrial property protection. Weights and dimensions are for guidance only.

Metalstampi reserves the right, at any time and without notice, to make technical modifications or changes in construction or dimensions in order to improve production.

CONNECT STEEL™, CONNECT GUMMY SYSTEM™, CONNECT EVOLUTION™ AQUAFRAME ERGONOMIC™, JOIN SYSTEM™, JOIN SYSTEM AIR STOP™, WHITEBOX™, FLASHLINE HARD™, FLASHLINE EAGLE™, FLASHLINE ACCESSORIES™ and their translations are all trademarks of Metalstampi Srl (TV) Italy.

The product images on the catalogue, price list and packaging are provided for illustrative purposes only.

METALSTAMPI srl

Head Office

Production Plant -

Accessories

Vicolo Biban, 7

31030 Biban di Carbonera

Treviso - Italy

Tel. +39 0422 398250

Production Plant - Profiles

Via Giovanni Amendola, 5

31020 Villorba

Treviso - Italy

info@metalstampi.com

www.metalstampi.com

