

SUPPORT FRAMES FOR SANITARY FITTINGS AQUAFRAME ERGONOMIC

STR	STRENGTHS					
1	Laboratory tested products with determination of the breaking load.					
2	Steel kit installed on the different types of metal structure.					
3	Products built to support standard wall-mounted ceramic sanitaryware (washbasins, toilets), and technical systems in plasterboard walls.					
4	Built to adhere to the coating (to avoid subsequent cracking).					
5	Products can be custom-made (vertical feet can be extended to recover work site quotas, adaptation of frames for suspension of ceramic sanitaryware or particular loads).					

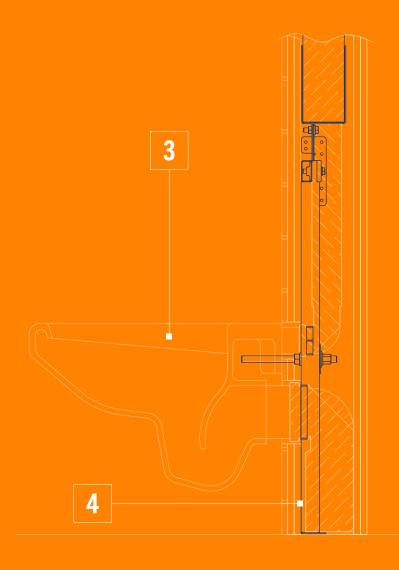


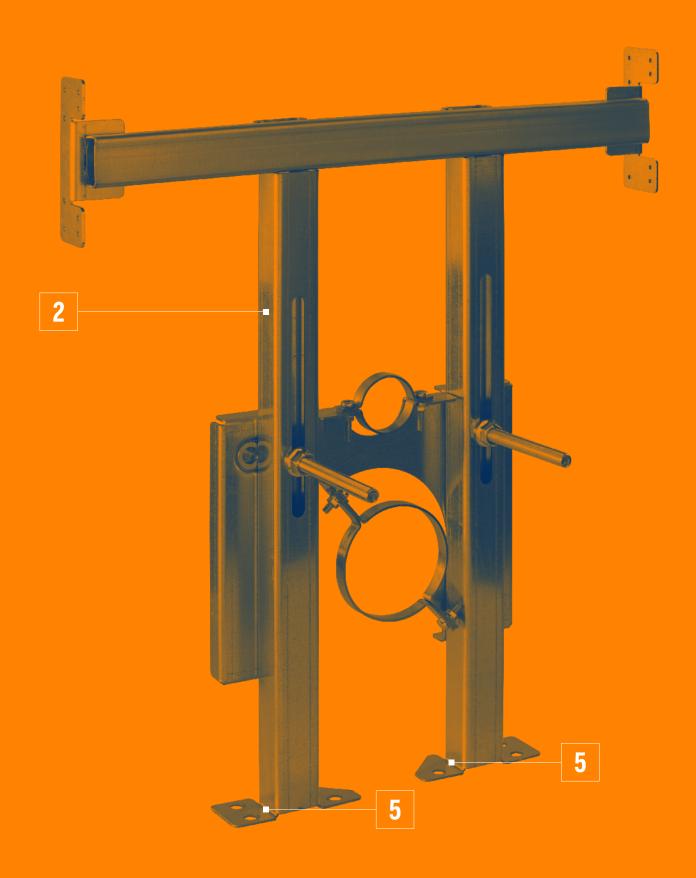


CARRIER FRAME FOR WALL-HUNG WASH BASIN WITH COUPLINGS M-F 1/2


M-F 1/2

Code	Description	Dimension and thickness	Weight per package	Application	Sales unit
AE00001010	carrier frame for wall-hung wash basin with ½" M-F couplings	b 550 h 310 p 47 t 1,5-2,5	4,24	wall	1 piece



axonometric view scale 1:10

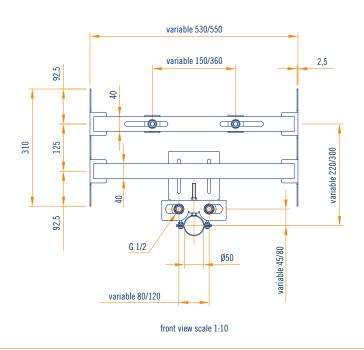

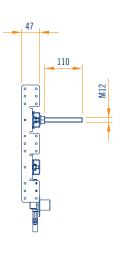


side view scale 1:10

CARRIER FRAME FOR WALL-HUNG WASHBASIN FOR DISABLED ACCESS WITH COUPLINGS





M-F 1/2


Code	Description	Dimension and thickness	Weight per package	Application	Sales unit
	carrier frame for wall-mounted washbasin for disabled access,	b 550 h 375 p 47			
AE00001012	with ½" M-F couplings	t 1,5 - 2	4,30	wall	1 piece

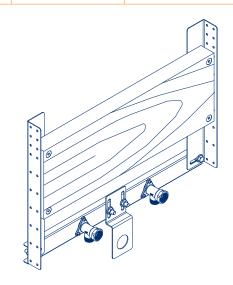

axonometric view scale 1:10

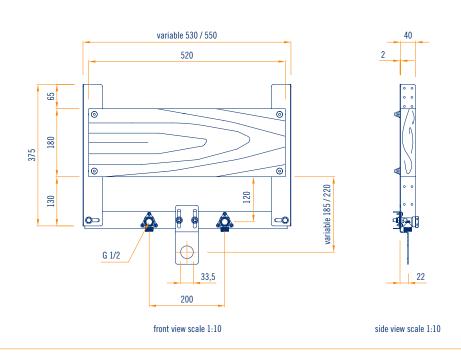

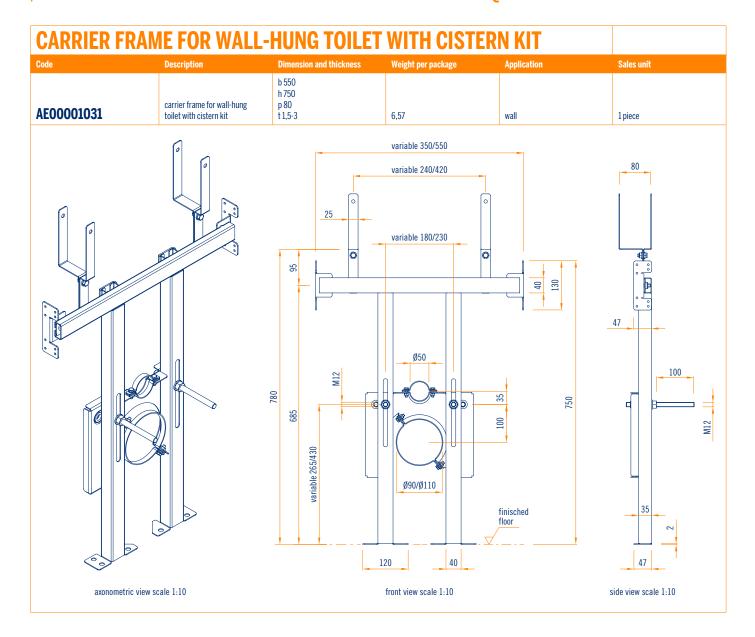

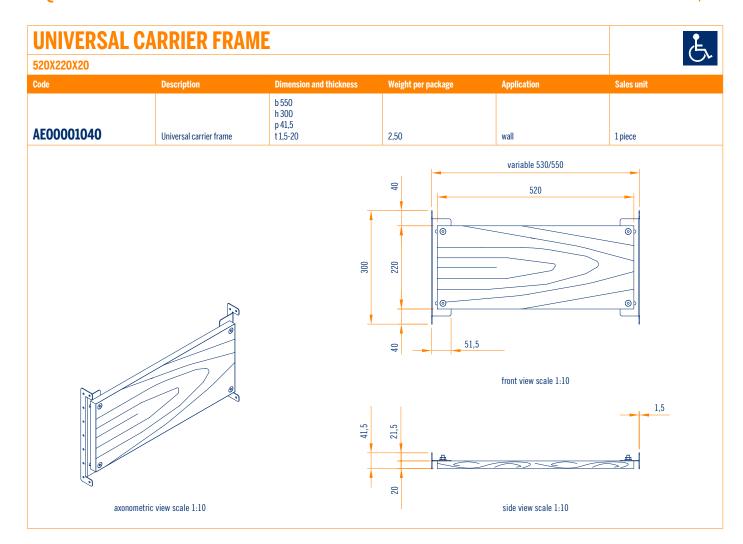

IMPORTANT RECOMMENDATIONS FOR USING AND STORING PRODUCTS

CE MARKING

Please note that each product is part of a hanging/connection kit for connecting to the upper anchoring system and to the supporting element in dry construction systems **for use inside buildings.**

The various components are identified in the catalogue and price list with the CE logo.

Each CE product has a Declaration of Performance (DOP).

Durability: class B (Components of a building exposed to variable relative humidity up to 90% and to variable temperatures up to 30°C but with no exposure to corrosive pollution agents).

RECOMMENDATIONS FOR STORING METAL FRAMING ELEMENTS

We recommend to store packages in a covered area with a relatively dry atmosphere and as constant a temperature as possible, to avoid condensation that could consume the passivation coat protecting the galvanised surface.

If stored outdoors **(not recommended)**, please cover so as to ensure the material is fully protected against adverse weather conditions (rain, fog, snow), making sure the packages are stored in a slightly inclined position. The cover must nevertheless ensure sufficient airflow (the two surfaces must not be in direct contact) so that moisture does not settle and create condensation.

GENERAL SALES CONDITIONS

- Payment for orders must comply with the terms established upon confirmation of order.
- The order will be filled, shipped and delivered in the shortest time possible.
- No claims for damage, even partial may therefore be made in case of delay.
- The cost of transportation and packaging will be included in the sales price, unless the order is below the established quantity for a minimum order.
- No returns will be accepted for custom orders under any condition.
- Returns (only for standard products) will be accepted with a depreciation of 30% of purchase value (for re-packaging and handling expenses), in unopened boxes and upon verification of the condition of the material, and within no more than a year of production.
- The transportation for the return of materials will be at the expense of the customer
- 24-month warranty for design and production flaws is guaranteed from the delivery date.
- All disputes shall be subject to the exclusive jurisdiction of the court of Treviso.

Head Office Production Plant -Accessories Vicolo Biban, 7

31030 Biban di Carbonera Tel. +39 0422 398250

Production Plant - Profiles

Via Giovanni Amendola, 5 31020 Villorba

info@metalstampi.com www.metalstampi.com







