

STEEL FLASHLINE PROFILES FLASHLINE FINISH



METALSTAMPI

STEEL PROFILES FLASHLINE FINISH

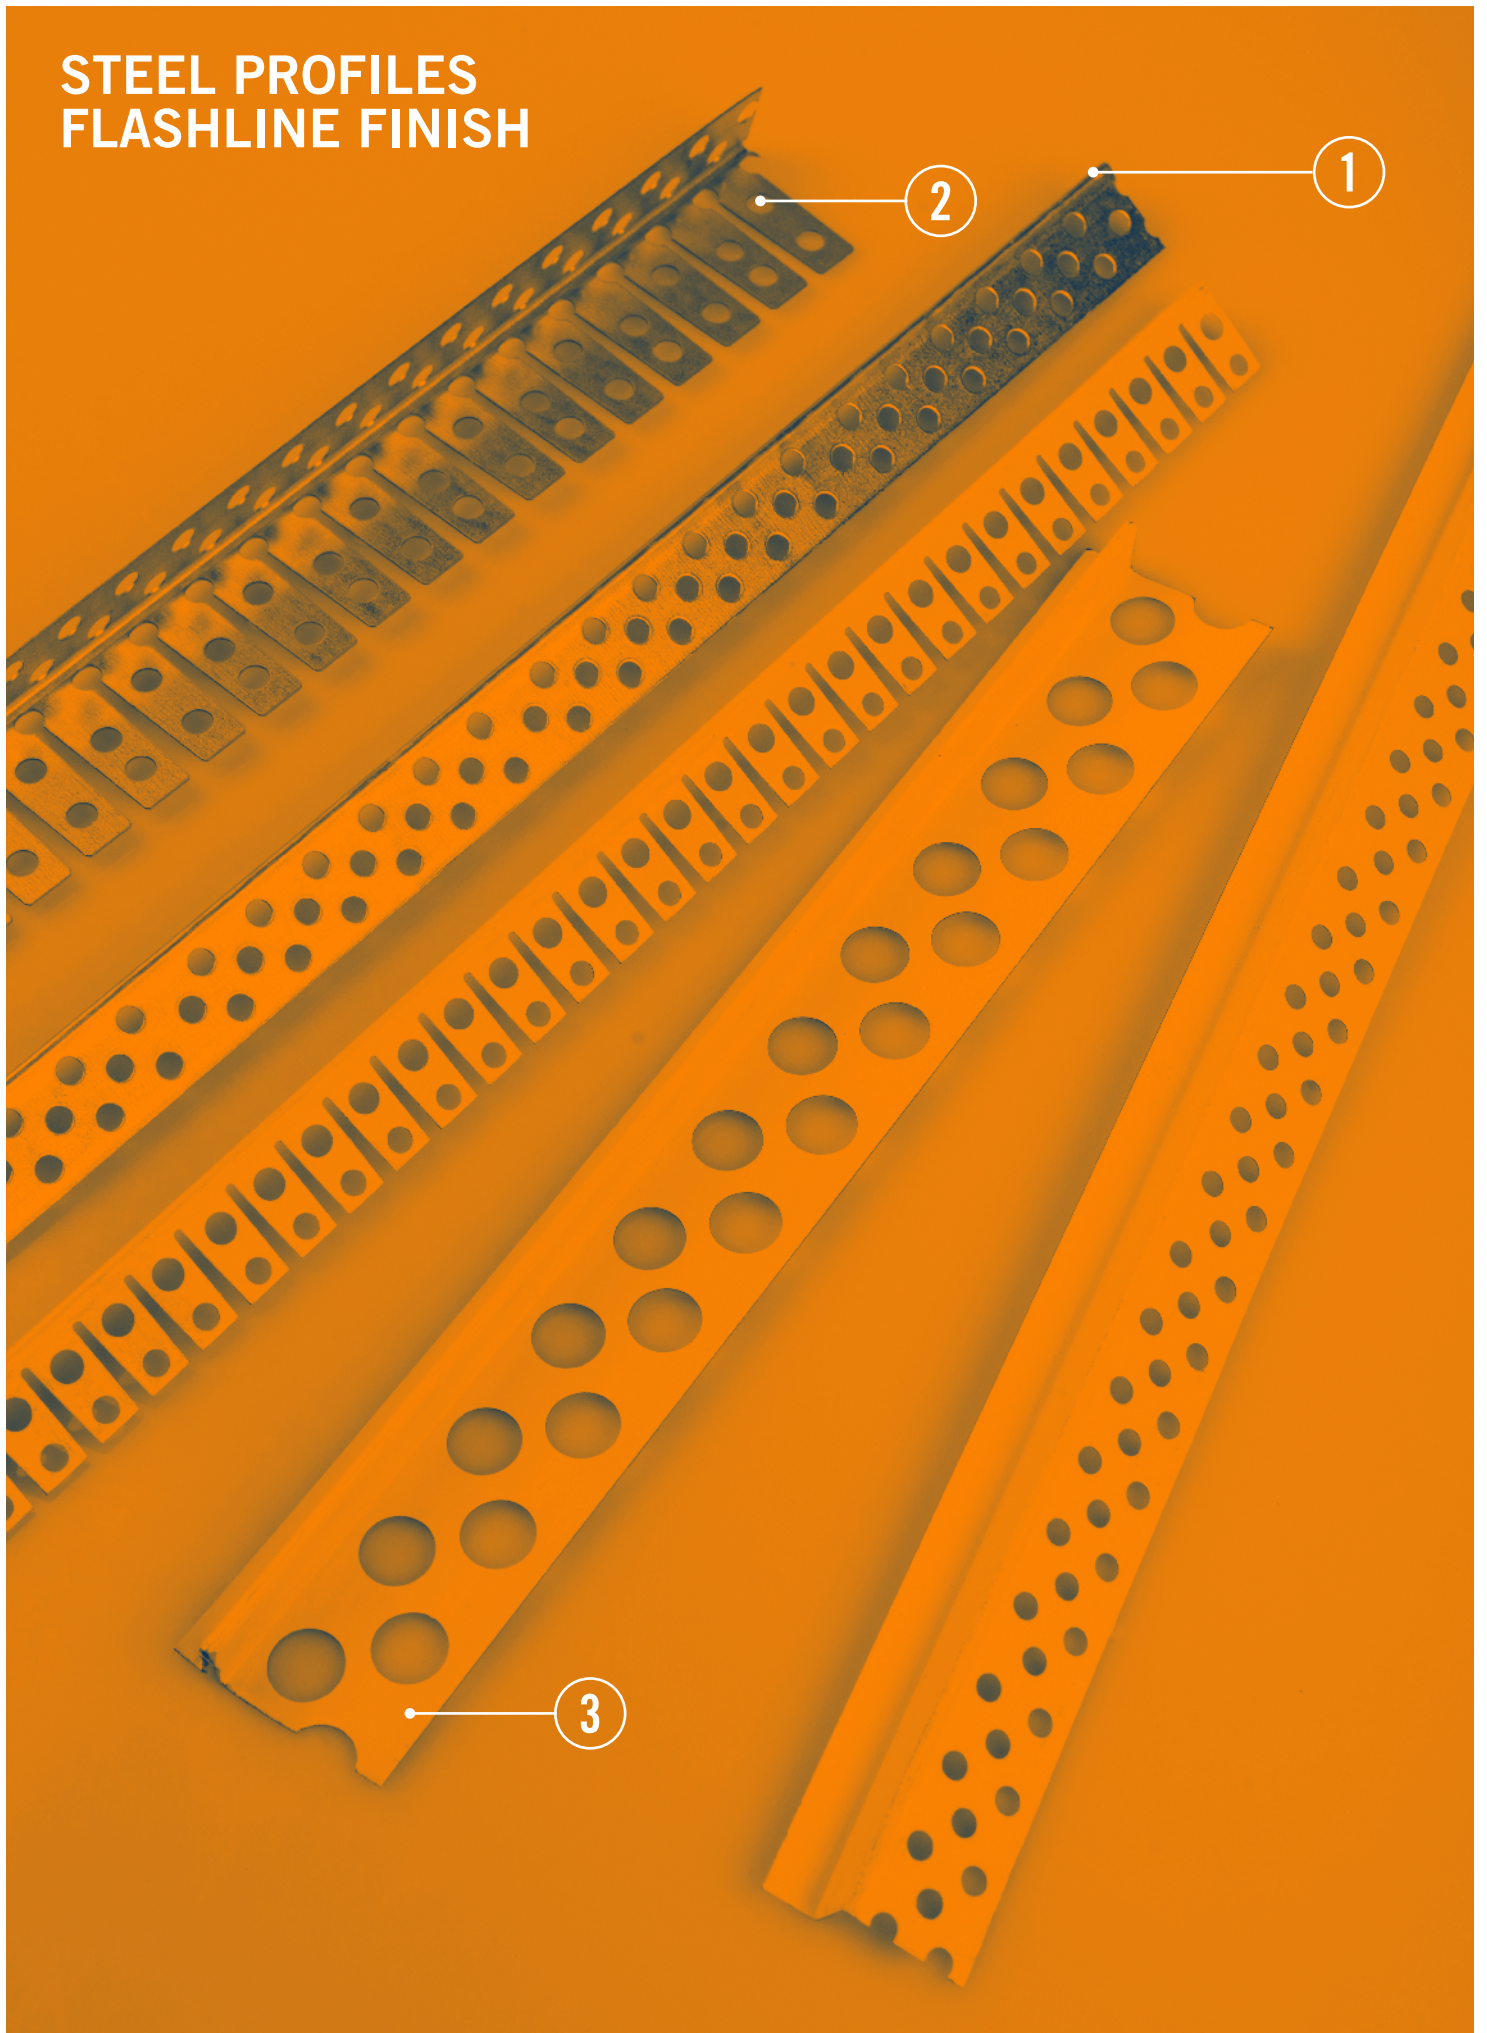


STRENGTHS


- 1— Conformity of the product with the CE marking, according to European directive EN 14195 (determination of the yield strength according to EN directive 10002-1), and EN 14353 (absence of permanent deformations or fractures following bending tests).
- 2— Large perforations in the products to facilitate adhesion of the sealant to the coating surfaces.
- 3— Product easy to work (cutting and screwing facilitated from the thickness of the material).

DECORATION PROFILES FOR PLASTERBOARD STRUCTURES

Item	Description	Dimension and thickness	Weight per pallet	MI per pkg.	Application	Sales unit
PF3030.135	135° corner bead V/30/30	b 30 h 30 s 0.5	5.10	30.00	suspended ceiling double wall dividing wall	10 total pieces
	V/30/30/3000/0.5	l 3000				

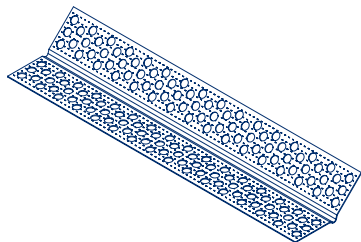


axonometric view scale 1:5




front view scale 1:2



Item	Description	Dimension and thickness	Weight per pallet	MI per pkg.	Application	Sales unit
PF5050.90-180	variable angle 90°- 180° corner bead L/32/32	b 32 h 32 s 0.5	14.85	60.00	suspended ceiling double wall dividing wall	20 total pieces
	L/32/32/3000/0.5	l 3000				




axonometric view scale 1:5




front view scale 1:2



Item	Description	Dimension and thickness	Weight per pallet	MI per pkg.	Application	Sales unit
PF3625.SC	90° corner bead for curved surfaces L/40/20	b 40 h 20 s 0.5	5.90	60.00	suspended ceiling double wall dividing wall	20 total pieces
	L/40/20/3000/0.5	l 3000				




axonometric view scale 1:5




front view scale 1:2



Item	Description	Dimension and thickness	Weight per pallet	MI per pkg.	Application	Sales unit
PF1423	90° edge bead L/14/23	b 23 h 14 s 0.5	3.98	30.00	suspended ceiling double wall dividing wall	10 total pieces
	L/14/23/3000/0.5	l 3000				









axonometric view scale 1:5









front view scale 1:2



Item	Description	Dimension and thickness	Weight per pallet	MI per pkg.	Application	Sales unit
PF2626	90° edge bead L/26/40	b 40 h 26 s 0.5	8.19	30.00	suspended ceiling double wall dividing wall	10 total pieces
	L/26/40/3000/0.5	l 3000				
 <p>axonometric view scale 1:5</p>		 <p>front view scale 1:2</p>				


Item	Description	Dimension and thickness	Weight per pallet	MI per pkg.	Application	Sales unit
PF1623	90° edge bead U/23/16/10	b 16 h 10 s 0.4	4.68	30.00	suspended ceiling double wall dividing wall	10 total pieces
	U/23/16/10/3000/0.4	l 3000				
 <p>axonometric view scale 1:5</p>		 <p>front view scale 1:2</p>				

Item	Description	Dimension and thickness	Weight per pallet	MI per pkg.	Application	Sales unit
PF1423.SCB	90° edge bead for curved surfaces painted white L/14/25	b 25 h 14 s 0.5	3.23	30.00	suspended ceiling double wall dividing wall	10 total pieces
	L/14/25/3000/0.5	l 3000				
 <p>axonometric view scale 1:5</p>		 <p>front view scale 1:2</p>				


Item	Description	Dimension and thickness	Weight per pallet	MI per pkg.	Application	Sales unit
PF1423.GD	control joint with pvc core T/14/50	b 50 h 14 s 0.5	7.80	30.00	suspended ceiling double wall dividing wall	10 total pieces
	T/14/50/3000/0.5	l 3000				
 <p>axonometric view scale 1:5</p>		 <p>front view scale 1:2</p>				

246 FLASHLINE FINISH

Item	Description	Dimension and thickness	Weight per pallet	MI per pkg.	Application	Sales unit
	perimeter shadow bead painted white T/6/14	b 6 h 14 s 0.5			suspended ceiling double wall dividing wall	10 total pieces
PF614.BT	T/6/14/3000/0.5	l 3000	7.13	30.00		




axonometric view scale 1:5

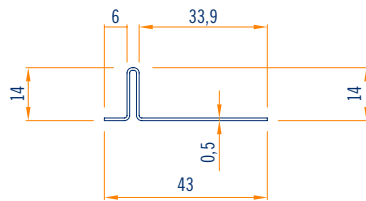


front view scale 1:2



Item	Description	Dimension and thickness	Weight per pallet	MI per pkg.	Application	Sales unit
	perimeter shadow bead painted white T/10/14	b 10 h 14 s 0.5			suspended ceiling double wall dividing wall	10 total pieces
PF1014.BT	T/10/14/3000/0.5	l 3000	7.65	30.00		




axonometric view scale 1:5

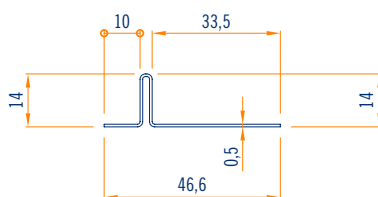


front view scale 1:2



Item	Description	Dimension and thickness	Weight per pallet	MI per pkg.	Application	Sales unit
	perimeter z-mold shadow bead painted white Z/11/12	b 11 h 12 s 0.5			suspended ceiling double wall dividing wall	10 total pieces
PF1012.BZ	Z/11/12/3000/0.5	l 3000	4.43	30.00		




axonometric view scale 1:5




front view scale 1:2



Item	Description	Dimension and thickness	Weight per pallet	MI per pkg.	Application	Sales unit
	perimeter z-mold shadow led Z/27/13	b 27 h 13 s 0.6			suspended ceiling double wall dividing wall	6 total pieces
PF1327	Z/27/13/3000/0.6	l 3000	7.11	18.00		



axonometric view scale 1:5



front view scale 1:2



IMPORTANT RECOMMENDATIONS FOR USING AND STORING PRODUCTS

CE Marking

Please note that each product is part of a hanging/connection kit for connecting to the upper anchoring system and to the supporting element in dry construction systems **for use inside buildings**. The various components are identified in the catalogue and price list with the CE logo.

Each CE product has a Declaration of Performance (DOP).

Durability: class B (Components of a building exposed to variable relative humidity up to 90% and to variable temperatures up to 30°C but with no exposure to corrosive pollution agents).

Recommendations for storing metal framing elements

We recommend to store packages in a covered area with a relatively dry atmosphere and as constant a temperature as possible, to avoid condensation that could consume the passivation coat protecting the galvanised surface.

If stored outdoors (**not recommended**), please cover so as to ensure the material is fully protected against adverse weather conditions (rain, fog, snow), making sure the packages are stored in a slightly inclined position. The cover must nevertheless ensure sufficient airflow (the two surfaces must not be in direct contact) so that moisture does not settle and create condensation.



Metalstampi s.r.l.
Vicolo Biban, 7
31030 Biban di Carbonera (TV) Italy
Tel. +39 0422 398250
export@metalstampi.com
www.metalstampi.com